

PRINCIPAL SPECIFICATIONS

- Design: Berret Racoupeau.
- Interior design: Nauta Design.
- Length overall: 12.15 m.
- Hull length: 11.82 m.
- Hull beam: 3.91 m.
- Light displacement: 8260 Kg.
- Minimum draught with standard cast-iron deep keel: 1.90 m.
- Minimum draught with optional cast-iron shallow keel: 1.55 m.
- Air draught: 17.65 m.
- Fresh water capacity: 360 L.
- Fuel capacity: 200 L.
- Engine power: 40 HP.
- CE Certification: A8 / B9 / C10 / D10.



TECHNICAL SCHEDULE

Designed according to the European RCD requirements and CE Certification.

Complying with these regulations as an absolute minimum ensures that the Océanis 40 offers important safety features such as:

- Safety and protection of persons on board.
- Durability of materials.
- Safety and stability.
- Safety when manoeuvring.
- Fire protection.
- Environmental protection and prevention of engine emissions.

STANDARD SAIL PLAN

- I : 15 m.
- J : 3.95 m.
- P : 14.02 m.
- E : 4.80 m.
- LP (140 % overlap) : 5.53 m.

STANDARD SAIL AREA

- Sail area : 78.40 m².
- Mainsail : 38.50 m².
- Genoa : 39.90 m².
- Spinnaker asymétrique : 95.00 m².

- HULL -

The hull is of single-skinned GRP construction. Local areas of reinforcement (keel, rudder, chainplates, hull / deck joint) serve to strengthen the structure. A single-skinned structural inner moulding is bonded and laminated to the hull. Its structural role is important as it takes and absorbs the stresses at pressure points (chainplate tie rods, keel, rudder, etc.) ensuring their distribution and so guaranteeing reduced strain on the hull. The surface of the inner moulding makes cleaning easier and provides a better finish. The standard hull colour is white with silver livery; a Steel Blue colour hull is available as an option.

- DECK -

The deck is of glass fibre and balsa sandwich construction for optimum strength / weight ratio as well as excellent heat and sound insulation.

All working areas and areas of movement around the deck are provided with a non-slip "diamond point" finish.

- HULL / DECK JOINT -

The hull/deck joint is screwed and bonded and surrounded by a solid wood rubbing strake.

This mechanical joint ensures a watertight assembly whilst also improving safety when moving around on deck.

- KEEL -

The keel is fitted to the boat by a system of screws and stainless steel backing plates and by bonding.

The keel is cast-iron.

To increase its life, the keel is given an anti-corrosion treatment and improved finish in the factory before assembly, using epoxy-based coatings and paint.

- STEERING SYSTEM -

- Underhung rudder with stainless steel stock.

Twin helm positions in aft cockpit:

- 2 leather trimmed, 900 mm diameter, column mounted steering wheels.
- Twin bulkhead mounted steering gear.
- Metal cable transmission system.
- Deck access point for emergency steering, and emergency tiller.



ON DECK

- MOORING AND ANCHORING -

- Single welded stainless steel bow fitting.
- Offset fairlead, enabling anchor to be left in position.
- 6 aluminium 400 mm long mooring cleats with stainless steel protection plates on top of the hull / deck line.
- Self-draining anchor well with clinch fitting and hatch cover.

- PULPITS AND GUARDRAILS -

- Open stainless steel pulpit with step and navigation lights.
- 2 stainless steel pulpits, one port and one starboard.
- 1 lifebuoy holder.
- 1 outboard motor bracket.
- 1 ensign staff holder.
- Double row of inox guardrails supported by 4 single and 4 double stanchions.
- 2 side openings in guardrails.

- COCKPIT -

4 cockpit stowage lockers:

- 1 locker to port.
- 1 locker to starboard.
- 1 locker under starboard helm seat.
- 1 wet locker between helm seats.
- 1 gas locker for 2 bottles located under port helm seat.
- Teak slatted cockpit benches.
- Twin steering consoles with stainless steel handrail, capable of taking navigation instruments (instruments available as an option).
- 1 column-mounted compass at each helm position.
- Engine control panel located near the starboard helm seat.
- GRP cockpit table, with 2 folding leaves, oddments locker, bottle rack or pivoting support (option) to take chart reader (option), stainless steel handrail, 12 V socket and lamp with shade.
- 2 winch handle pockets.
- GRP self-draining cockpit sole.

- BATHING PLATFORM AND TRANSOM -

- Vertically opening access gate to bathing platform aft with stainless steel gas strut.
- 1 bathing ladder with solid wood treads to starboard.
- 1 cold water cockpit shower to starboard.

- MAST AND BOOM -

MAST:

- Classic 9/10 anodised aluminium deck-stepped mast.
- 2 sets of aft-swept spreaders.
- Mast fitted with slides.
- Articulated blocks at mast foot.



BENETEAU

OCEANIS 40

BOOM:

- Anodised aluminium boom.
- 2 automatic reefing lines.
- 1 mainsail foot outhaul.

- STANDING RIGGING -

- Stainless steel wire rigging (forestay, shrouds, lower shrouds, backstay).
- 1 classic forestay.
- 1 single backstay with bottlescrew.
- Stainless steel shroud chainplates are taken back to the inner moulding by stainless steel tie rods.

- RUNNING RIGGING -

All lines (except boom topping lift) are led back to the cockpit.

The running rigging comprises:

- 1 mainsail halyard.
- 1 genoa halyard with jammer and cleat at mast.
- 1 boom topping lift with cleat at mast.
- 1 mainsail foot outhaul.
- 1 mainsheet with track.
- 2 rapid reefing lines led back to the cockpit
- 2 genoa sheets.
- 1 rigid boom vang with tackle.

Handling the running rigging is by means of:

- 5 jammers to port.
- 3 jammers to starboard.
- 6 cleats distributed to port and starboard.

- SAILS -

- 1 furling genoa with 140 % overlap, reinforced with anti-UV protection strip.
- 1 classic semi-full battened mainsail with logo, slides and cars.
- Pearl Grey / Captain Blue coloured Lazy Jacks and Easy bag.

- MAINSAIL SYSTEM -

- 1 mainsheet track (1.5 m long) on coachroof with control lines led back to forward end of cockpit.
- 1 mainsheet block assembly.
- Mainsheet led back to starboard winch.

- GENOA SYSTEM -

- 1 genoa furler with drum on the deck. The furling line is led back to cockpit on coachroof to port.
- 2 genoa sheet tracks with piston adjustable cars on side decks.
- 2 genoa sheet return blocks.

- WINCHES -

- Chrome finish Harken brand winches:
- 2 genoa sheet winches on coaming (46.2 STC).
- 2 winches on coachroof (40.2 STC).
- 2 aluminium winch handles.
- 2 winch handle pockets in cockpit.

- PORTS, HATCHES AND COVERS -

To provide maximum light and optimum ventilation, each space in the Océanis 40 has at least one source of fresh air and light, and many have two or more.

22 sources of light:

- 1 large panoramic window + 2 side windows.
- 6 hull port.
- 6 opening hatches.
- 8 opening ports.
- 1 companionway hatch.

- ENGINE -

- Yanmar 40 HP engine with drive shaft transmission.
- Engine mounting built into hull inner moulding.
- Engine compartment insulated with soundproofing foam.
- Ventilation secured by an air intake and forced air exhaust on transom.
- Engine access through an opening located under companionway steps supported by two gas struts.
- 2 side access hatches in the aft cabins for maintenance.
- Stainless steel drive shaft with moulded GRP protection in the hull.
- Fixed three-blade propeller.
- 200-litre rotomoulded fuel tank with electronic gauge located under aft port berth.
- Sea water and diesel filter with sediment reservoir.
- Engine control panel with built-in key start located in the cockpit to starboard near the helm seat.

- ELECTRICITY -

Electrical panel:

- Electrical panel with 10 x 12 V switches + 11 fused switches.
- 1 x 12V cigarette lighter socket.
- 1 x 12V voltmeter.
- 1 water gauge and 1 fuel gauge via central LCD screen.
- 1 low battery alarm, and low diesel and water tanks alarm.

Supply:

- 1 x 140 Amp service battery located beneath aft starboard cabin.
- 1 x 110 Amp engine battery located beneath the sole at the foot of the companionway.

Battery charging:

- 1 x 80 Amp alternator coupled to the engine.
- 1 power distributor.

Protection:

- Rigging earthed against lightning.

Lighting and sockets:

- 6 reading lights.
- 14 halogen deckhead lights.
- 1 white / red striplight at the chart table.
- 1 white striplight in the galley.
- Bow and stern navigation lights.
- Engine light (steaming light) in front of mast.
- 1 masthead anchor light.
- Conduits for running cables for options.

- WATER SYSTEM -

Fresh water:

- Electric water pump with expansion bottle and filter protecting the circuit.
- 2 rotomoulded water tanks mounted on the hull inner moulding (200 L beneath aft starboard cabin berth + 160 L beneath forecabin berth).
- 2 stainless steel water fillers. Tanks are filled separately.
- Tank selection by 1/4 turn valves.
- 1 cold water cockpit shower.

Drainage:

- Electric wastewater pumps for shower/s.
- 2 bilge pumps (one manual and one electric).
- 1 electric drainage pump for icebox.
- Self-draining cockpit and side decks drainage.


Hot water:

- 1 x 25 L electric water heater.

ACCOMMODATION

- Woodwork in fruitwood-stained Alpi.
- Stripwood-style laminated soles.
- Fabric lining to hull in saloon and cabins.

**Version 1 forecabin – 1 head compartment,
2 aft cabins – 1 head compartment (FI)**

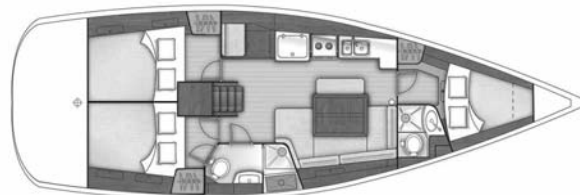

- FORECABIN -

- Headroom: 1.90 m at foot of berth.
- Central double berth: 2 m x 0.50 m x 1.60 m with marine mattress.

Stowage:

- 1 hanging locker to port + oddments locker.
- 1 shelf around the berth.
- 1 sliding drawer under the berth.
- 1 stowage locker with hatch behind the berth.
- Stowage lockers under the berth.

Openings and lighting:

- 1 large opening hatch (442 x 442) with blind / mosquito screen.
- 1 opening hatch (260 x 260) with blind/mosquito screen.
- 2 fixed hull ports (one on each side of the hull) with curtains.
- 3 halogen deckhead lights with integral switches.

- FORWARD HEAD COMPARTMENT -

Access through the forecabin.

Head compartment is a one-piece moulding for good water-tightness and easy maintenance, comprising:

- Large bowl manual marine toilet.
- Hot / cold water mixer tap with shower and holder.
- 1 mirror.
- 1 stowage locker and 1 closed high shelf.
- 1 locker beneath washbasin with wastebin and paper holder.
- 1 towel holder on entrance door.
- 1 glass holder.
- 1 opening deck hatch (260 x 260) with blind / mosquito screen.
- 2 halogen deckhead lights with switch.

- COMPANIONWAY -

- PMMA companionway hatch with 2 hinged solid wood louvre doors.
- Wooden companionway with suspended steps in moulded wood with non-slip surface.
- 2 stainless steel handrails.
- Lifting companionway retained by two gas struts for access to engine compartment.

Lighting:

- 1 halogen deckhead light.
- 2 switches for saloon deckhead lights.

- STARBOARD SALOON -

- U-shaped saloon with 6 - 8 seater settee and 4 cushions.
- Stowage under the seating.
- Central settee with stowage locker, on pantograph mechanism for clear passage in front of the galley.

- Inlaid saloon table on 2 aluminium legs.
- 1 bar unit and shelf behind settee backrest.
- 3 closed shelves along the hull.
- 1 shelf with stainless steel fiddle.
- 1 stainless steel handrail on bulkhead of aft head compartment.

Lighting:

- 3 halogen deckhead lights.

- PORT SALOON -

Chart table to port:

- Facing forward.
- Chart table with flap and oddments locker.
- Moulded wood fiddle.
- 1 shelf beneath the table top.
- Navigator's seat with stowage locker beneath seat.
- 2 opening hatches allowing access to various electrical equipment items and capable of taking navigation instruments (option).
- 12V electrical panel with 12V socket.

Lighting:

- One halogen deckhead light.
- 1 white/red striplight.

Linear galley to port:

- Rectangular stainless steel double sink.
- Mixer tap with hot and cold pressurised water.
- Stainless steel gimballed 2-burner hob and oven with stainless steel safety rail.
- Top-opening 170 L icebox with 12 V refrigerating unit.
- White laminated worktop.

Stowage:

- 1 locker with double doors under sink with wastebin.
- 1 cutlery drawer.
- 1 locker with 2 shelves under the drawer.
- 4 high closed stowage shelves.
- 1 shelf with stainless steel fiddle.

Lighting:

- 2 halogen deckhead lights.
- 1 light over hob.

Openings:

- 2 hull ports (1 port / 1 starboard) with curtains.
- 1 double panoramic window with pleated blinds.
- 1 large side window to port with 2 opening deck ports (300 x 120) in coaming and blinds.
- 1 large side window to starboard with 1 opening deck port (300 x 120) in coaming and blind.
- 1 opening deck hatch (442 x 442) with blind / mosquito screen.

- STARBOARD AFT HEAD COMPARTMENT -

Head compartment is a one-piece moulding for good water-tightness and easy maintenance.

- Access through saloon and aft starboard cabin.
- Large bowl manual marine toilet.
- 1 x 80 L rigid holding tank as standard.
- Worktop with washbasin and wood handrail.
- Hot / cold water mixer tap.
- 2 closed shelves.
- 1 double mirror.
- 1 locker beneath washbasin with wastebin and paperholder.
- 1 towel holder on entrance door.
- 1 glass holder.
- 1 fixed side window with 1 opening port (300 x 120) in coaming and 1 curtain.
- 3 halogen deckhead lights, 1 switch.
- 1 striplight over washbasin.


- PORT AND STARBOARD AFT CABINS -

- 2 symmetrical aft cabins.
- Headroom: 1.90 m approx.
- 1 double berth: 2.00 m x 1.50 m x 1.30 m with marine mattress.
- 2 closed shelves along the hull.
- 1 hanging locker with 2 shelves.

Openings and lighting in each cabin:

- 1 fixed hull port with curtain.
- 1 opening port (300 x 120) in coaming.
- 1 port to cockpit (300 x 120).
- 1 opening deck hatch (260 x 260) with blind / mosquito screen.
- 3 halogen deckhead lights with integral switches.

**Version I forecabin - 1 aft cabin -
1 head compartment (BI)**

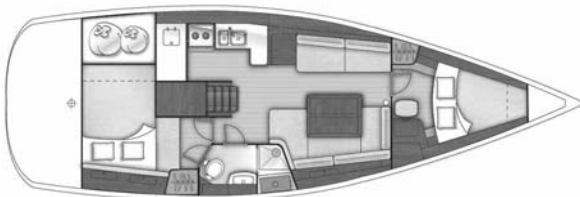

- FORECABIN -

- Headroom: 1.90 m at foot of berth.
- Double island berth: 2 m x 0.50 m x 1.60 m with marine mattress.

Stowage:

- 1 hanging locker to port + oddments locker.
- 1 hanging locker, dressing table + oddments locker to starboard.
- 1 removable seat with locker.
- 1 shelf around the berth.
- 1 sliding drawer under the berth.
- 1 stowage locker with hatch behind the berth.
- Stowage lockers under the berth.

Openings and lighting:

- 1 large opening hatch (442 x 442) with blind / mosquito screen.
- 2 opening hatches (260 x 260) with blinds / mosquito screens.
- 2 fixed hull ports (one on each side of the hull) with curtains.
- 3 halogen deckhead lights with integral switches.

- COMPANIONWAY -

- PMMA companionway hatch with 2 hinged solid wood louvre doors.
- Wooden companionway with suspended steps in moulded wood with non-slip surface.
- 2 stainless steel handrails.
- Lifting companionway retained by two gas struts for access to engine compartment.

Lighting:

- 1 halogen deckhead light.
- 2 switches for saloon deckhead lights.

- STARBOARD SALOON -

- U-shaped saloon with 6 - 8 seater settee and 4 cushions.
- Stowage under the seating.
- Inlaid saloon table on 2 aluminium legs.
- 1 bar stowage locker and shelf behind settee backrest.
- 3 closed shelves along the hull.
- 1 shelf with stainless steel fiddle.
- 1 stainless steel handrail on bulkhead of aft head compartment.

Lighting:

- 3 deckhead lights.

- PORT SALOON -

U-shaped galley to port:

- Rectangular stainless steel double sink.
- Mixer tap with hot and cold pressurised water.
- Stainless steel gimbaled 2-burner hob and oven with stainless steel safety rail.
- Top-opening 70 L icebox compartment.
- Front-opening 12 V, 130 L refrigerator.
- White laminated worktop.

Stowage:

- 5 high closed stowage shelves.
- 1 locker with double doors under sink with wastebin.
- 1 cutlery drawer.
- 1 locker with 2 shelves under the drawer.
- 1 shelf with stainless steel fiddle.

Lighting:

- 2 halogen deckhead lights.
- 1 light over hob.



BENETEAU

OCEANIS 40

Chart table:

- Aft facing.
- Chart table with flap and oddments locker.
- Moulded wood fiddle.
- 1 shelf beneath the table top.
- 2 opening hatches allowing access to various electrical equipment items and capable of taking navigation instruments (option).
- 12V electrical panel with 12V socket.

Lighting:

- 1 halogen deckhead light.
- 1 white/red striplight.

Settee:

- 1 x 2-seater bench seat for use as chart table seating.
- 2 closed shelves along the hull.
- 1 shelf with stainless steel fiddle.

Lighting:

- 1 halogen deckhead light.

Openings in the saloon:

- 2 hull ports (1 port / 1 starboard) with curtains.
- 1 panoramic window with pleated blinds.
- 1 large side window to port with 2 opening deck ports (300 x 120) in coaming and blinds.
- 1 large side window to starboard with 1 opening deck port (300 x 120) in coaming and blind.
- 1 opening deck hatch (442 x 442) with blind / mosquito screen.
- 1 opening deck hatch (260 x 260) with blind / mosquito screen.

- STARBOARD AFT HEAD COMPARTMENT -

Head compartment is a one-piece moulding for good water-tightness and easy maintenance.

- Access through saloon and aft starboard cabin.
- Large bowl manual marine toilet.
- 1 x 80 L rigid holding tank as standard.
- Worktop with washbasin and wood handrail.
- Hot / cold water mixer tap.
- 2 closed shelves.
- 1 double mirror.
- 1 locker beneath washbasin with wastebin and paper holder.
- 1 towel holder on entrance door.
- 1 glass holder.
- 1 fixed side window with 1 opening port (300 x 120) in coaming and 1 curtain.
- 3 halogen deckhead lights, 1 switch.
- 1 striplight over washbasin.

- AFT CABIN -

- Headroom: 1.90 m approx.
- 1 double berth 2.10 m x 1.50 m with marine mattress.
- 2 closed shelves along the hull.
- 1 stowage locker.
- 1 hanging locker with 2 shelves.
- 1 bench seat – desserte d'accès au lit - fabric matching that used in the saloon.

Openings and lighting:

- 1 fixed hull port with curtain.
- 1 opening port (300 x 120) in coaming.
- 1 port to cockpit (300 x 120).
- 1 opening deck hatch (260 x 260) with blind / mosquito screen.
- 3 halogen deckhead lights with integral switches.

OPTIONS

- EQUIPMENT INCLUDED IN THE "EXCLUSIVE" VERSION -

- 1000 W vertical electric windlass with up / down control.
- Teak cockpit sole.
- Teak covered GRP cockpit table with white PVC cover.
- Stereo radio / CD / MP3 player with two speakers in the saloon and two waterproof speakers in the cockpit.
- Folding, pivoting saloon table.
- Indirect lighting in saloon.
- Leather trim on both companionway handrails and on handrail of aft head compartment bulkhead.
- Deluxe gimbaled 2-burner hob with oven/grill.
- 12V refrigerating unit in top-opening icebox (2 cabin version).
- Perspex shower screen in aft head compartment.
- Mirror on forward bulkhead in forecabin.
- Dressing table mirror in forecabin (2 cabin version).
- 220 V power supply with shore connection on 15 m extension, 1 x 220V electrical panel, 1 x 220V socket in each cabin, at the chart table and in the galley.
- 25 A battery charger.
- 1 supplementary 140 A service battery.

- YACHT CLUB PACK -

- Pearl grey sprayhood or cockpit bimini.
- Hot and cold water cockpit shower.
- Victory Oyster bed covers.
- Table setting with Bénéteau logo.



BENETEAU

OCEANIS 40

- Ground tackle: 1 x 16 kg Britany anchor + 25 m of 10 mm diameter chain + 38 m of 18 mm warp, 4 mooring lines and 6 fenders (860 x 230).

- C ELECTRONICS PACK Raymarine brand electronics -

Port cockpit:

- ST60+ Tridata Log, speedo, depth sounder.
- ST60+ wind vane, anemometer.

Aft face of cockpit table:

- C80 multifunction 8.4" colour screen (GPS, plotter, chart reader for Navionics Gold Cartography – chart not included in delivery)
- Pivoting holder for electronic screen.

Starboard cockpit:

- ST6002 automatic pilot – LSRV2 - controller for autopilot.

- ELECTRONICS NOT INCLUDED IN PACK -

- Radar – Radome only.
- Smartcontroller autopilot remote control.
- PC interface.
- Gyro compass transducer.
- RAY 49EVHF.

- OTHER OPTIONS -

- Steel blue hull
- Asymmetric or symmetric spinnaker gear + pole.
- U-bolt for detachable staysail.
- Anodised in-mast furling with sail.
- Easy Sail (electric winch to port, genoa cars adjustable from cockpit, cam cleats on genoa sheet foot blocks, adjustable backstay, Harken Speedgrip winch handle, extra winch handle holder, extra mainsail and genoa telltales and rope cutter).
- Cockpit windlass control.
- White PVC steering wheel covers.
- Pearl grey cockpit cushions.
- Teak side decks.
- Bow thruster.
- Sea water foot pump.
- Microwave oven.
- Heating.
- Double berth in saloon.
- Additional seat in saloon.
- Electric WC.
- Additional black water holding tank.
- 40 amp battery charger.
- 800VA inverter.
- 3-blade folding propeller.
- 20" LDC TV + DVD and MP3 player + TV aerial.
- Mosquito screens for ports.
- Windex wind vane.

